

CERTIFICATE OF CONSTANCY OF PERFORMANCE

0751-CPR.2-008.3-01

In compliance with Regulation (EU) 305/2011 of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

**Factory made mineral wool (MW) products for thermal insulation of building
equipment and industrial installations**
(details cf. annex)

Placed on the market under the name or trade mark of

Rockwool Polska SP z.o.o.

Kwiatowa 14
66-131 Cigacice
Poland

and produced in the manufacturing plant

Rockwool B.V.

Industrieweg 15
6040 KD Roermond
Netherlands

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard


EN 14303:2009+A1:2013

under system 1 for the performance set out in this certificate are applied and that the factory production control conducted by the manufacturer is assessed to ensure the

constancy of performance of the construction product.

This certificate was first issued on 09.09.2016 and will remain valid (but no longer than 03.07.2025) as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body

Gräfelfing, 03.07.2024

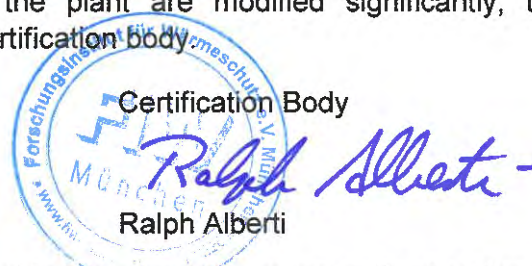

A publication of extracts or a referring to the Certificate of Constancy of Performance and its annex requires the prior written approval of FIW München. Certification body accredited by DAkkS according to DIN EN ISO/IEC 17065:2013. The accreditation is only valid for the scope of accreditation listed in the annex to the certificate D-ZE-14116-01-00

Factory: Rockwool B.V., Industrieweg 15, 6040 KD Roermond, Netherlands

Construction product(s): Factory made mineral wool (MW) products for thermal insulation of building equipment and industrial installations according to EN 14303:2009+A1:2013

Intended use: Thermal insulation products for building equipment and industrial installations

Level(s) or class(es) reaction to fire: for uses subject to regulations on reaction to fire A2 and A2L. Products for which a clearly identifiable stage in the production process results in an improvement in the reaction to fire classification by limiting of organic material.

Product				Reaction to fire EN 13501-1			
No.	Form	Name	Description	Classification	Range	Fire Group	Classification report
1	Pipe section	Teclit PS	Non-combustible mineral wool concentrically wound pipe section covered with reinforced aluminium foil	A2L-s1, d0	Do ≤ 300 mm Max. organic content: 7,2 kg/m ³ (4,1 m/m%) Density: ≤ 176 kg/m ³ Thickness: all for Do ≤ 300 mm	4	YB-2280-13E-RA-003
2	Pipe section	Teclit PS	Non-combustible mineral wool concentrically wound pipe section covered with reinforced aluminium foil	A2-s1,d0	Do > 300 mm Max. organic content: 7,1 kg/m ³ (3,7 m/m%) Density: ≤ 190 kg/m ³ Thickness: ≤ 100 mm	6	YA-2280-12E-RA-003
3	Pipe section	Rockwool 800	Non-combustible mineral wool concentrically wound pipe section faced with reinforced aluminum foil	A2L-s1, d0	Do ≤ 300 mm Max. organic content: 7,8 kg/m ³ (4,1 m/m%) Density: ≤ 191 kg/m ³ Thickness: all for Do ≤ 300 mm	13	YB-2280-15E-RA-001

Product				Reaction to fire EN 13501-1			
No.	Form	Name	Description	Classification	Range	Fire Group	Classification report
4	Pipe section	Rockwool 800	Non-combustible mineral wool concentrically wound pipe section faced with reinforced aluminum foil	A2-s1,d0	Do > 300 mm Max. organic content: 8,2 kg/m ³ (4,1 m/m%) Density: ≤ 200 kg/m ³ Thickness: ≤ 100 mm	14	YA-2280-13E-RA-001
5	Pipe section	HEATROCK PS	Non-combustible mineral wool concentrically wound pipe section faced with reinforced aluminum foil	A2l-s1, d0	Do ≤ 300 mm Max. organic content: 7,8 kg/m ³ (4,1 m/m%) Density: ≤ 191 kg/m ³ Thickness: all for Do ≤ 300 mm	13	YB-2280-15E-RA-001
6	Pipe section	HEATROCK PS	Non-combustible mineral wool concentrically wound pipe section faced with reinforced aluminum foil	A2-s1,d0	Do > 300 mm Max. organic content: 8,2 kg/m ³ (4,1 m/m%) Density: ≤ 200 kg/m ³ Thickness: ≤ 100 mm	14	YA-2280-13E-RA-001

Detail information about the insulation products are given in the classification reports

Gräfelfing 03.07.2024

Certification Body



Ralph Alberti

